

VariPOS 719/819

19" Intel Sandy Bridge POS System



Integrated with 10.4" Display



Small Footprint




Ultra Slim & Aluminum Housing

Model Name		VariPOS 719	VariPOS 819
Main Spec	CPU	Intel® Pineview D510 (Dual Core) 1.66GHz	Intel® Core i5 2.5GHz Intel® Core i3 2.2GHz Intel® Mobile Celeron B810 1.6GHz
	Chipset	Intel® Pineview + ICH8M	Intel HM65
	System Memory	1 x SO-DIMM DDRII 667, up to 2GB	1 x SO-DIMM DDRIII 1333, up to 8GB
Display	TFT LCD	19" LED backlight	19" LED backlight
	Brightness	350 nits	350 nits
	Resolution	1280 x 1024	1280 x 1024
	Touch Screen	19" True Flat Projected Capacitive Technology	19" True Flat Projected Capacitive Technology
Storage	HDD Type	1 x SATA 6.4cm (2.5")HDD	1 x SATA 6.4cm (2.5")HDD
	SSD Type	1 x SATA 6.4cm (2.5") SSD (optional)	1 x SATA 6.4cm (2.5") SSD (optional)
	Compact Flash Type	N/A	N/A
I/O Ports - External	DC Input	1 x Mini Din 4P (DC 12V only)	1 x Mini Din 4P (DC 12V only)
	Cash Drawer	1 x RJ-11 (Power Pin 12V)	1 x RJ-11 (Power Pin 12V)
	Network (LAN)	1 x Gigabit Ethernet by RJ-45	1 x Gigabit Ethernet by RJ-45
	USB Port	6 x USB 2.0	6 x USB 2.0
	Serial Port	4 x RS-232 w/ RI/5V/12V power (COM1/2: DB-9, COM3/4 : RJ-48)	4 x RS-232 w/ RI/5V/12V power (COM1/2: DB-9, COM3/4 : RJ-48)
	Audio	1 x Line-out ; 1 x Mic-in	1 x Line out / MIC in
	PS/2 Port	1 x PS/2 Keyboard	1 x PS/2 Keyboard
	LPT Port	1 x DB-25 Printer Port	1 x DB-25 Printer Port
	VGA Port	N/A	1 x DB-15 VGA Port
I/O Ports - Internal	Card Reader & iButton	COM5 : Internal Pin header for Card Reader & iButton	COM5 : Internal Pin header for Card Reader & iButton
	Audio	HD Audio compliant, 2W Speaker x 2	HD Audio compliant, 2W Speaker x 2
	Bus Expansion	1 x Mini-PCI-E Slot	1 x Mini-PCI-E Slot
Compliance		IP 66 on front panel	IP 66 on front panel
System Management		Desktop Management Interface (DMI)/ Preboot Execution Environment (PXE) /Wake on LAN (WoL) Advanced Configuration and Power Interface (ACPI)	Desktop Management Interface (DMI)/ Preboot Execution Environment (PXE) /Wake on LAN (WoL) Advanced Configuration and Power Interface (ACPI)
OS Support		Windows® 7 / Windows® XP Embedded / Windows® XP Pro Embedded / Fedora Core	Windows 7 Professional for Embedded Systems / Windows Embedded Standard 7 / Windows Embedded POSReady 7 / Ubuntu 12
Power Supply		120 Watts, Voltage: +12VDC 10A max.	120 Watts, Voltage: +12VDC 10A max.
Material		Main Unit: Die-casting aluminum ; I/O Cover:Plastic	Main Unit: Die-casting aluminum ; I/O Cover:Plastic
Color		Main Unit: Black / White	Main Unit: Black / White
Certifications		CE, FCC, Class-B, RoHS, WEEE	CE, FCC, Class-B, RoHS, WEEE
Dimension(W x H x D)		446 x 276 x 363 mm	446 x 276 x 363 mm
Weight		9.3 Kg	9.4 Kg
Operating Temperature		0°C ~ 40°C, 10% ~ 90% RH, non-condensing	0°C ~ 40°C, 10% ~ 90% RH, non-condensing
Storage Temperature		-20°C ~ 60°C, 10% ~ 90% RH, non-condensing	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing

* The right has been reserved to change the specification without prior notice.

DIMENSION

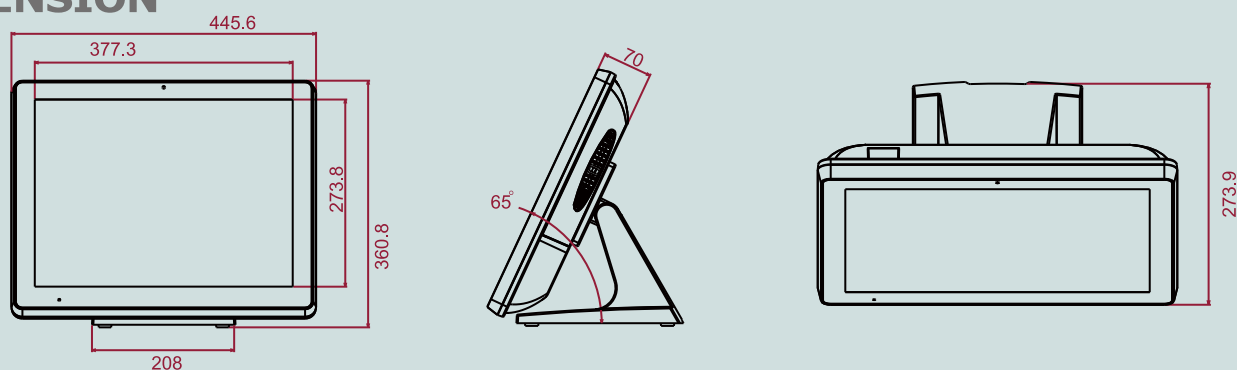

Poindus

Poindus Systems Corp.

Address: 6F., No. 1, Lane. 28, Xingzhong Rd., Neihu Dist.,
Taipei City 114, Taiwan(R.O.C.)

Tel:+886-2-77214688 Fax:+886-2-77212289 E-mail:sales@poindus.com